

OMNIUM STELLWAND

Umschreibung

Omnium Stellwände sind stabile, elegant verarbeitete Stellwände. Omnium Stellwände sind aus Rundrohren in den Abmessungen 30 x 2 mm und Vierkantprofilen in den Abmessungen 40 x 30 x 2 mm hergestellt und mit grauer Pulverbeschichtung RAL7035 versehen.

Anwendung

Wenn Arbeiten regelmäßig an verschiedenen Orten durchgeführt werden oder Flexibilität in der Ausstattung des Arbeitsraums benötigt wird, kann der Schutz mit fahrbaren Stellwänden eine komfortable Alternative bieten.

In Zeiträumen in denen nicht geschweißt wird oder nach beenden der Arbeiten kann die Stellwand schnell entfernt werden.

Vorhänge, Lamellen oder Streifen werden am oberen Träger befestigt um eine sichere Abtrennung herzustellen.

Omnium Stellwände sind mit 4 Lenkrollen, davon 2 mit Bremse, ausgerüstet.

Verwendung


- Omnium Stellwände können von einer einzelnen Person bedient werden und werden mit den zwei Lenkrollen mit Bremse fixiert.

Eigenschaften

Omnium Stellwände enthalten geschweißten Stahl-Teile, und sind grau RAL7035, Glanz ± 70%, pulverbeschichtet.

Technische Anwendungsinformationen

- Die CEPRO Omnium Stellwand wird als Bausatz in einer stabilen Kartonverpackung geliefert.
- CEPRO Omnium Stellwände wurden für den Einsatz im Innenraum entwickelt.
- Die Verbindungsschrauben und -mutter müssen regelmäßig kontrolliert werden.
- Kontrollieren Sie die Bestandteile der CEPRO Omnium Stellwand regelmäßig auf Risse und/oder andere Mängel. Ersetzen Sie bei Bedarf beschädigte Vorhänge oder Lamellen.

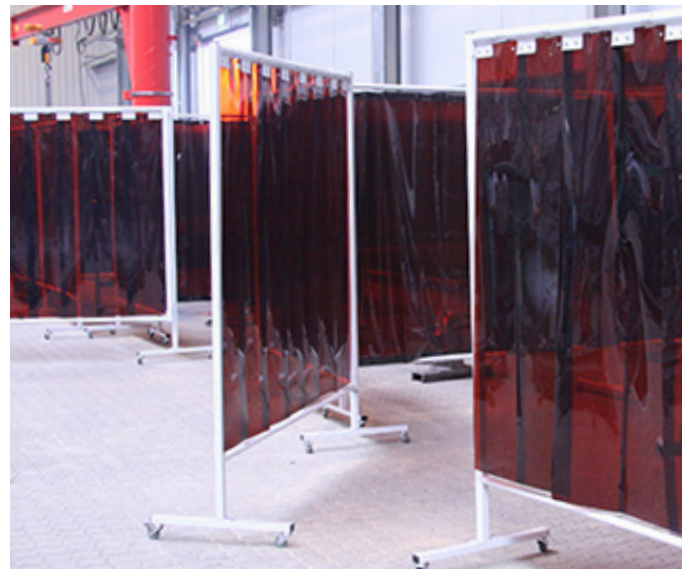

OMNIUM WELDING SCREEN

TECHNICAL DATA

- For steel basic welding screen:
- Carbon steel tubes, profiles, powder coated.
- Contain no toxic parts.
- Contain no inflammable parts.
- Contain no electrical parts.

USE AND HANDLING

Coating and tread surface castors will be damaged by open fire or intensive heat. There is a possibility that the screen will stuck by rough, unequal floor conditions. Oil or grease pollution do not have negative effects on the screens condition.

MAINTENANCE AND SAFETY

- Bolts must be periodic checked at free assembly.
- Castors must be checked on contamination to avoid malfunction.
- It is not safe to step on the screen for mobile purposes.
- Beams are only applicable for use of pvc strips, curtains, sheets or blankets, not for heavy weight products which overload the profile and castors.
- It is not recommended for hoisting operations.
- Swivel arm is only suitable for use of strip or curtain separation It is not recommended for hoisting operations.

FEATURES

Made from solid welded carbon steel tube and profiles. Screen is free moveable in any direction, castors can be turned for 360°. To apply the brake option on two castors, screen can be fixed at one position.

Poles can be provided with a hinge part on top at both sides to apply a swivel arm, to extent the separation at one or both sides.

Screen will be supplied in loose parts and must be fixed with included metric fasteners by basic tools.

DESIGN

Distance between floor level and upper beam is 200 cms, total width 213 cms. To obtain a stable construction, both foot profiles do have a length of 60 cms.


OMNIUM WELDING SCREEN

TECHNICAL SPECIFICATION

Type of welding screen	: solid, mobile screen
Total weight, basic screen	: 19 kgs.
Maximum static load beam	: 400 N
Maximum dynamic peak load beam	: 600 N
Range	: free moveable, 360°
Overall size height	: 2005 mm
Functional width	: 2130 mm
Fasteners	: Metric
Castor	: Ø50 mm
Castor	: 2 with break, 2 without brake
Castor	: maximum load 40 kgs
Castor	: Range 360°
Operation	: by hand
Coating	: powder coated in grey RAL7035
Materials	: steel tube and profiles
Application	: for internal use

OMNIUM WELDING SCREEN

DIMENSIONS OMNIUM SINGLE SCREEN

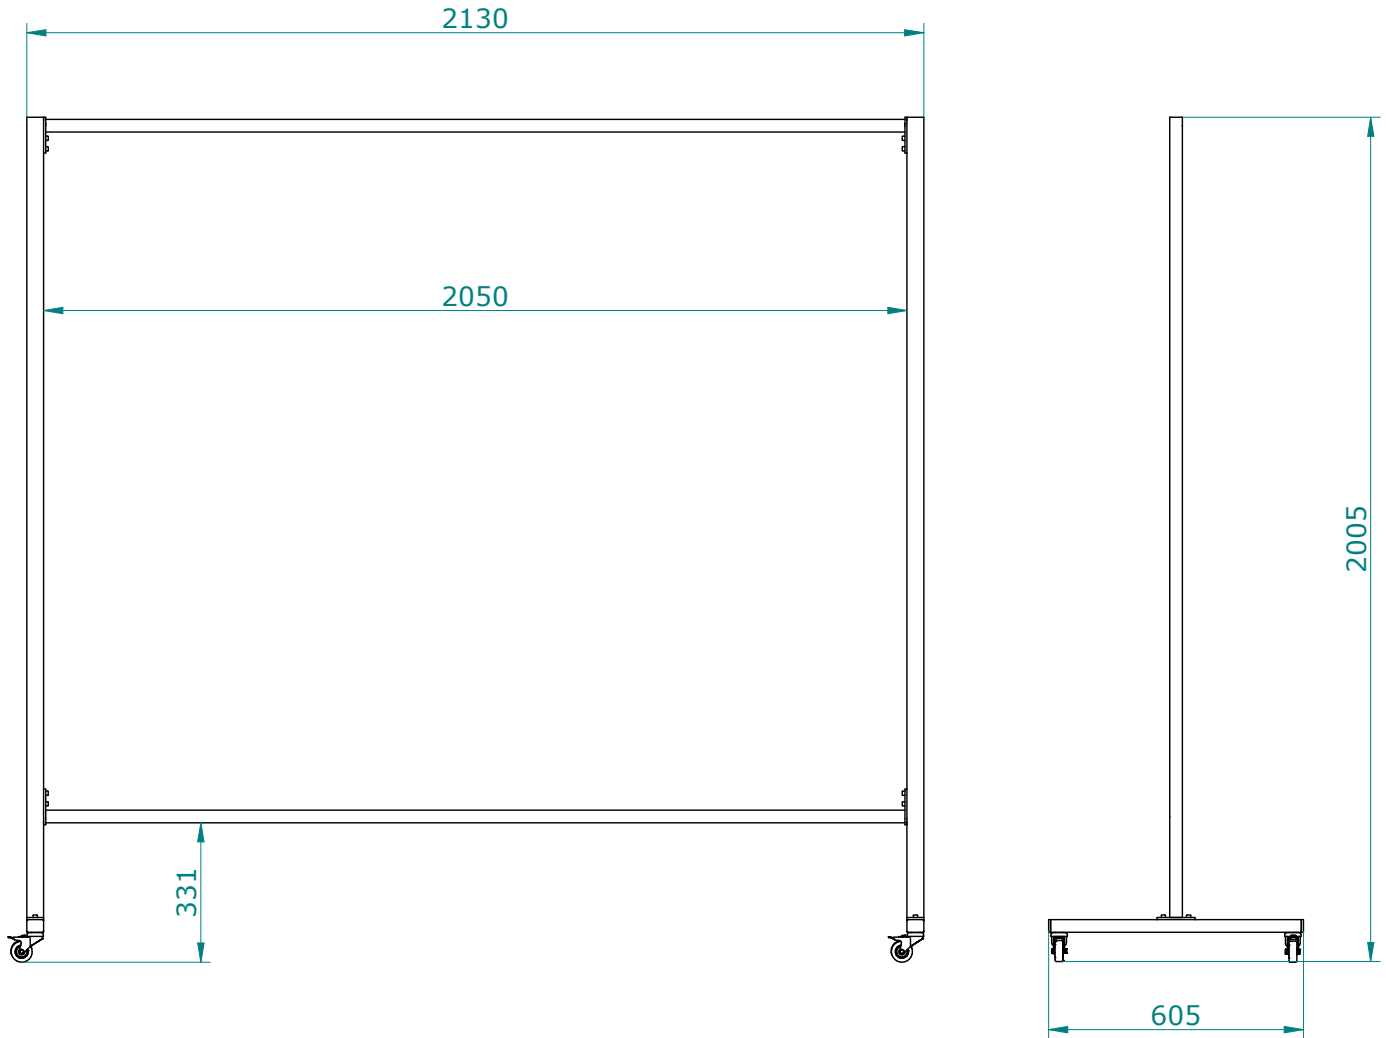


Version 001 - Check our website for the latest version.


CEPRO_PFS_Welding screens_ Omnium_2EN_rev

OMNIUM WELDING SCREEN

DIMENSIONS OMNIUM TRIPTYCH SCREEN SWIVEL ARMS 80 CM

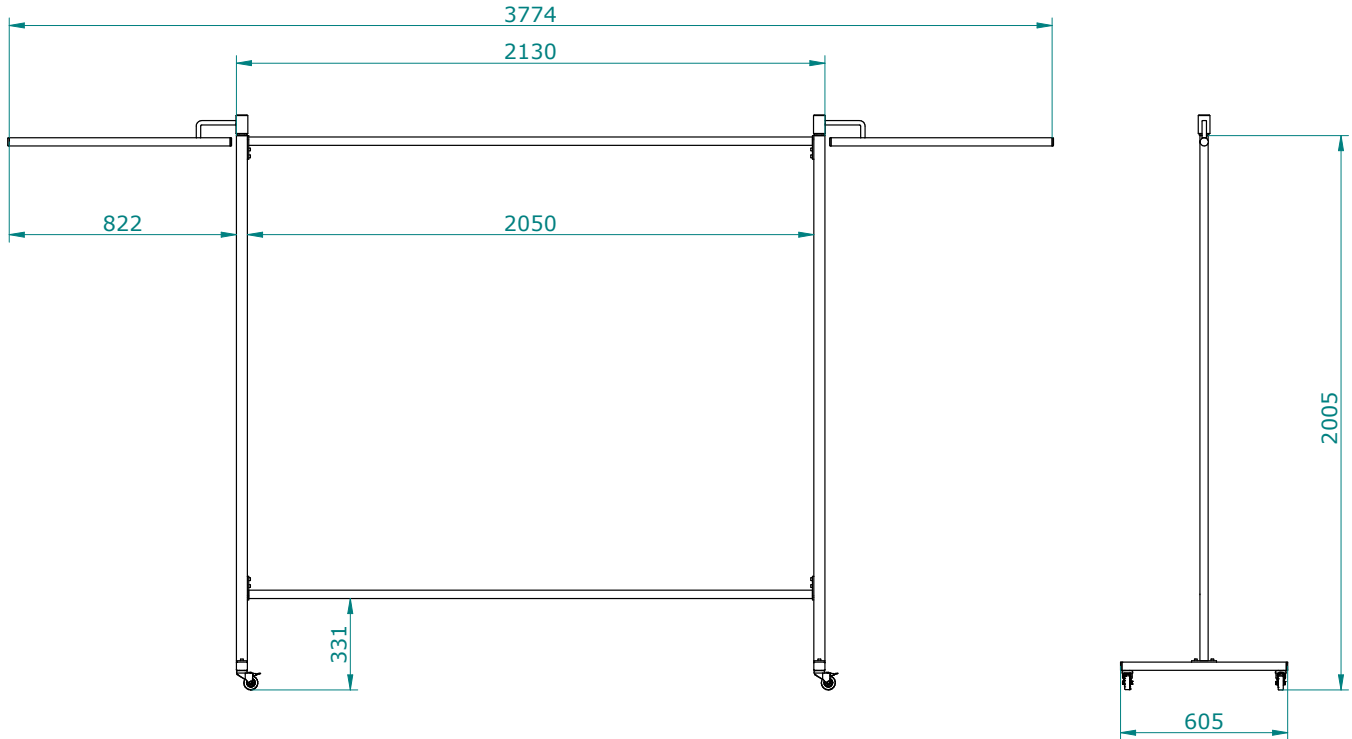


DIMENSIONS OMNIUM TRIPTYCH SCREEN SWIVEL ARMS 110 CM

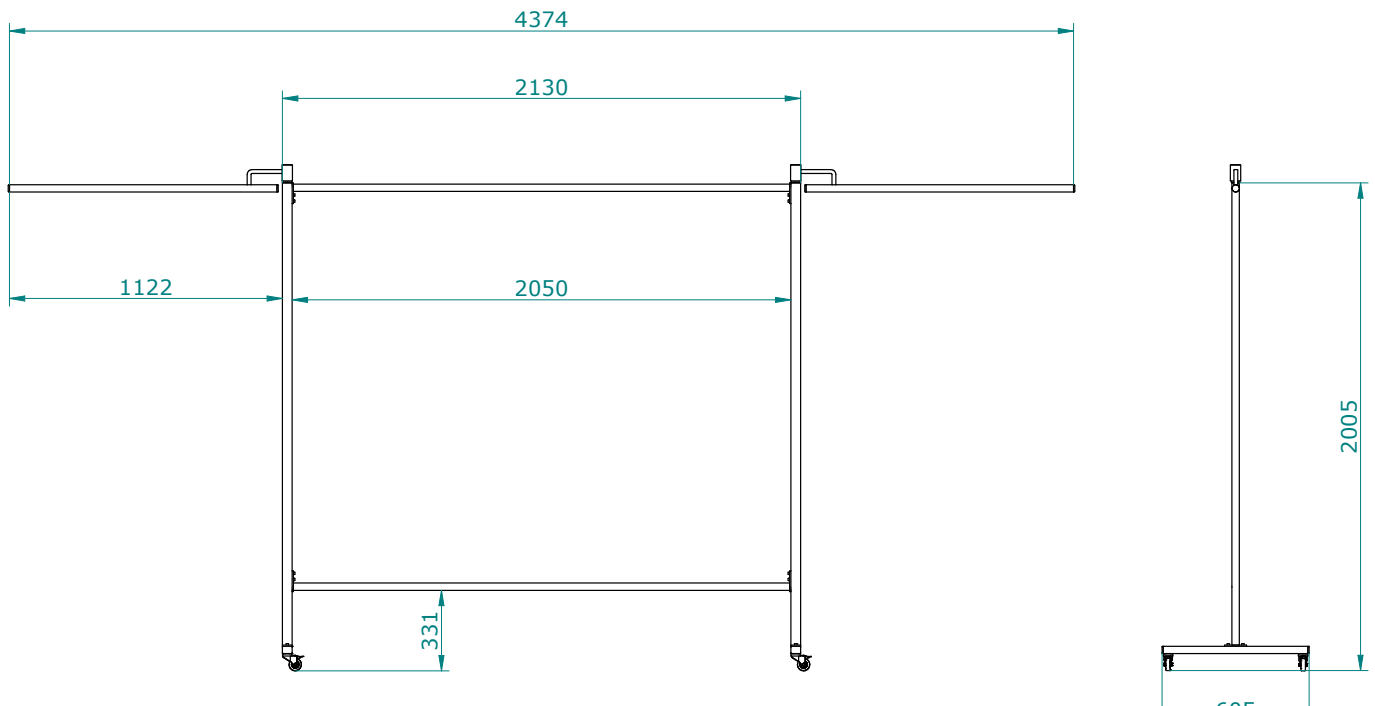

OMNIUM WELDING SCREEN


PART LIST - BASIC PARTS OMNIUM WELDING SCREEN

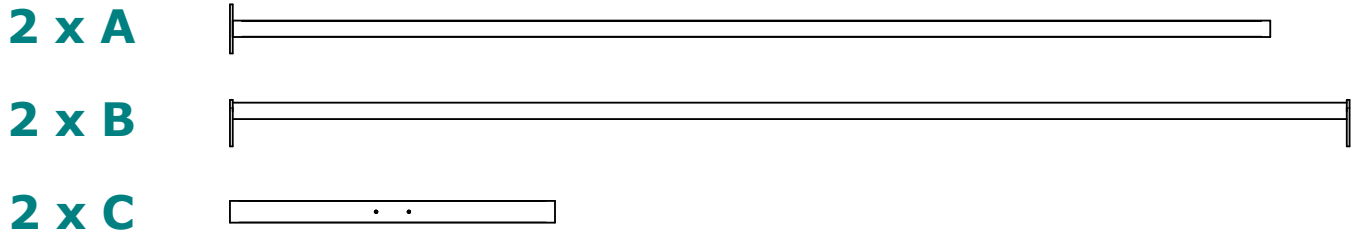

PART LIST - SWIVEL ARMS OMNIUM WELDING SCREEN





2 x D

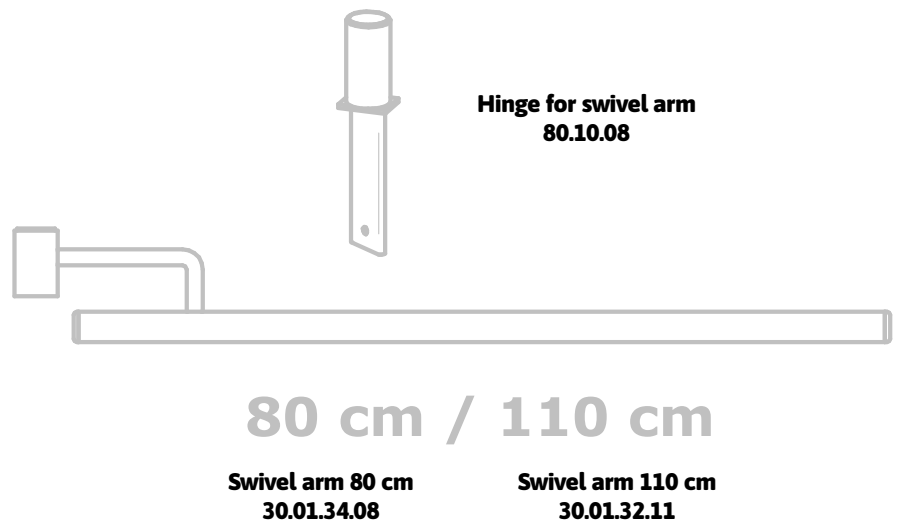


2 x E



OMNIUM WELDING SCREEN

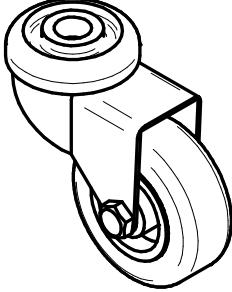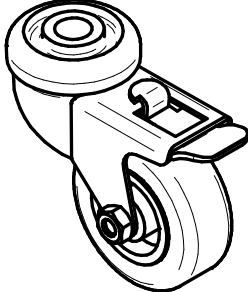PART LIST ACCESSOIRES OMNIUM WELDING SCREEN



40x30	no. 5	Ø50	Ø50
			
6 x	1 x	2 x	2 x
Cap end PVC	Hex Key	Castor without break 30.04.34.00	Castor with break 30.04.34.01

M6x12	M6x20	18x6,5
		
12x	4 x	4 x


Set fasteners basic screen

OMNIUM WELDING SCREEN


MOUNTING INSTRUCTION OMNIUM WELDING SCREEN

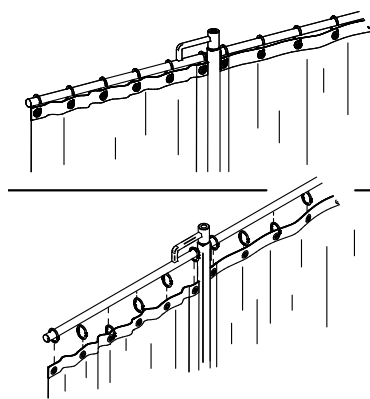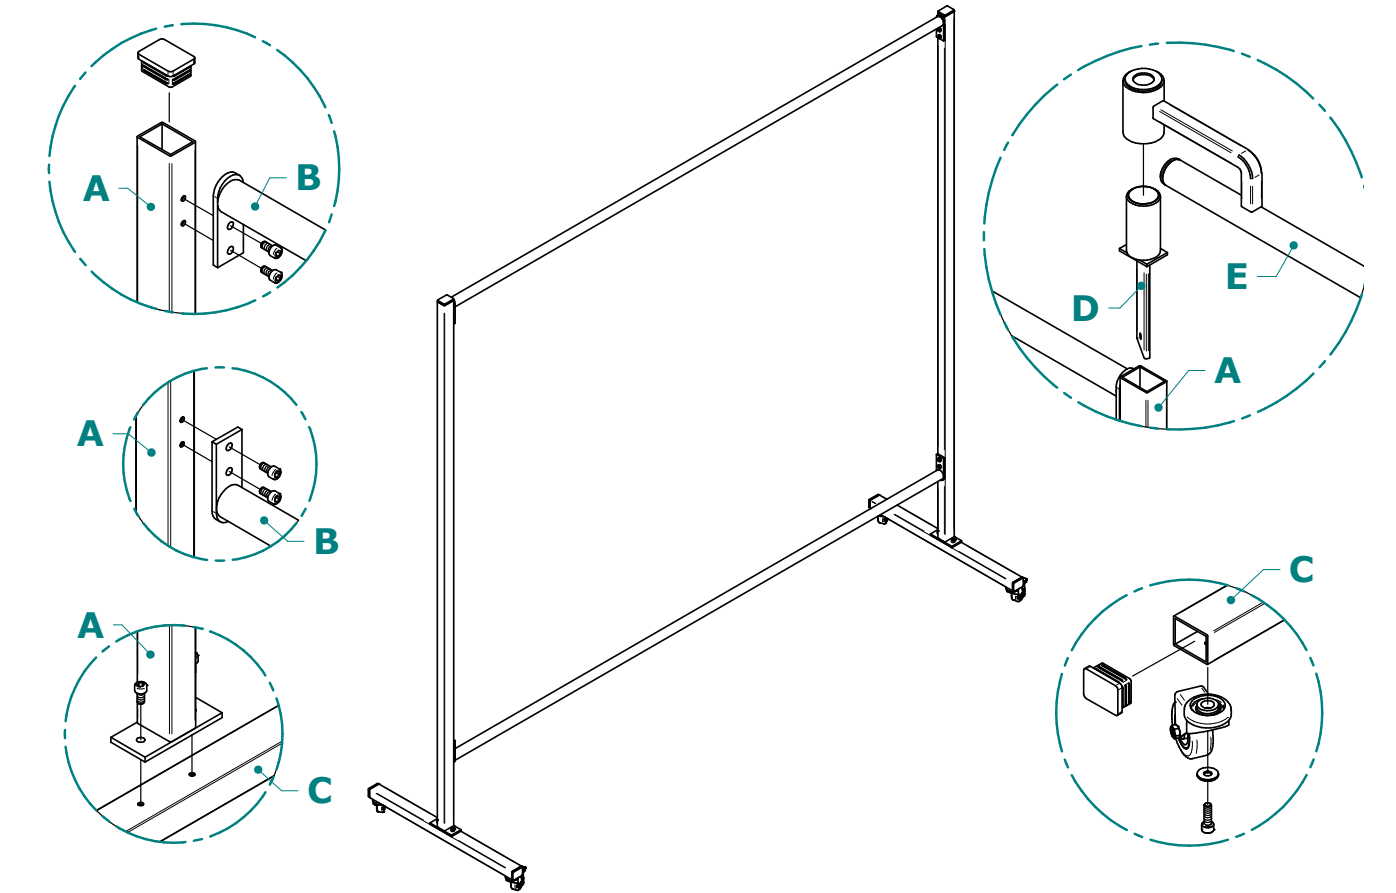

Mounting curtains

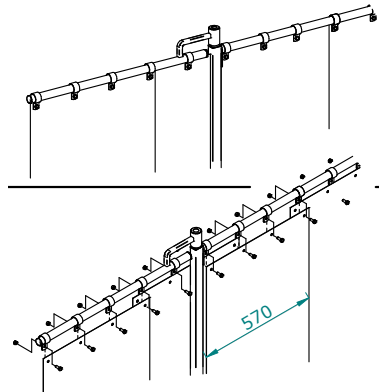

Mounting sheet

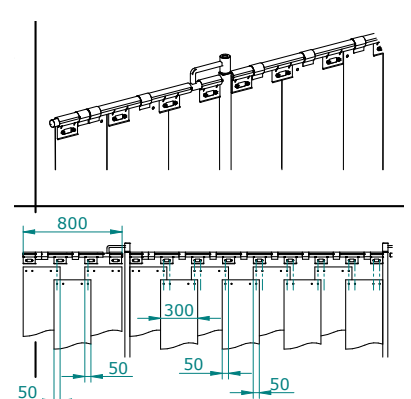

Mounting strips